STOVAX

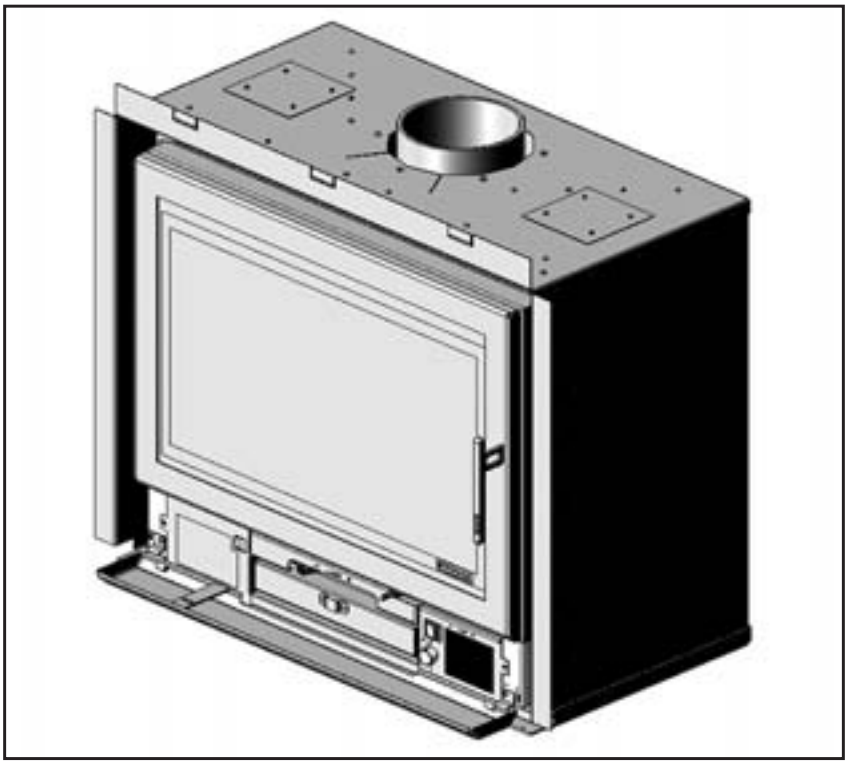

Riva 76 Fan Kit

Installation Instructions

Product Codes: **RV76FK** (For use with RVF76)

RV76BFK (For use with RVF76B)

For use in GB, IE (Great Britain and Eire)

IMPORTANT

For use with 230v 50 - 60Hz electricity supply only.

Please read these instructions carefully and in conjunction with the appropriate Riva Installation and User instructions. Care must be taken when handling the stove to avoid injury or damage to the stove.

They will be needed when maintenance or servicing is required.

THIS APPLIANCE MUST BE EARTHED

PM214-Issue 1 (Sept 2007)

INSTALLATION INSTRUCTIONS

PACKING LIST

- Riva Fan Kit

TOOLS REQUIRED

- 2.5mm hex key supplied with Riva Cassette

POWER SUPPLY

A 230v 50 - 60Hz supply is required.

THIS APPLIANCE MUST BE EARTHED

Provision for the power supply should be made before installing the product, with connections made by a qualified electrician via a 3 Amp supply and complying with any local and national regulations and guidelines

If the electricity supply cable is damaged do not use the appliance until it has been replaced. For safety reasons the replacement should be carried out by a Stovax servicing agent or a similarly competent electrician.

Live wire	Brown	Terminal Marked L / coloured RED
Neutral wire	Blue	Terminal Marked N / coloured BLACK
Earth wire	Green and yellow stripes	Marked E / ⏚ / colour GREEN or GREEN & YELLOW
230v 50 - 60Hz supply is required		

WARNING – FAILURE TO CONNECT THE WIRES CORRECTLY COULD PUT PEOPLE AT RISK FROM ELECTRIC SHOCK OR FIRE.

INSTALLATION INSTRUCTIONS

1

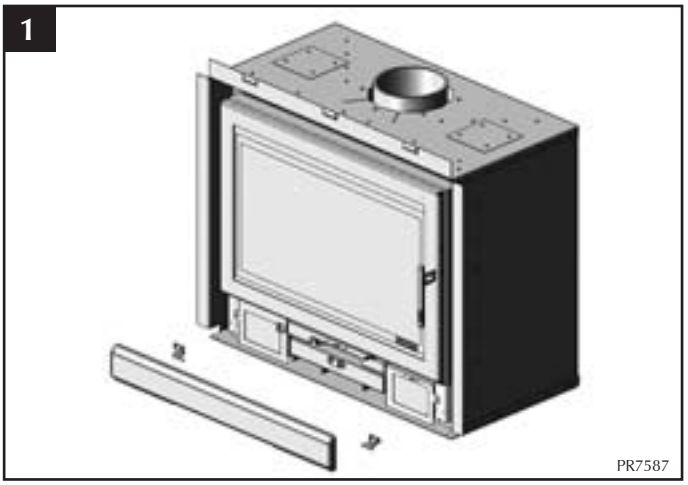

Remove ash cover and hinges, *diagram 1*
Also see Riva MF Cassette Installation Instructions (PM183) - Section 2. Ash pan door removal (Page 8)

2

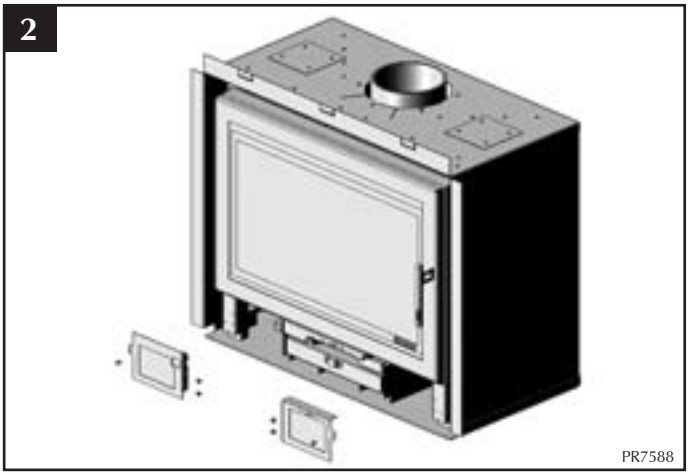

Remove fan fascias. Use the 2.5mm hex key supplied. Keep left hand fascia, *diagram 2*

INSTALLATION INSTRUCTIONS

3

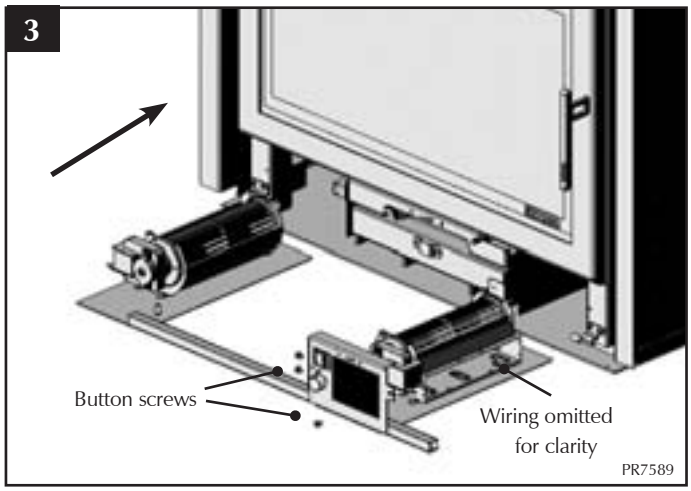

Slide fan chassis in to Riva 76 as shown and fix using existing button screws, *diagram 3*

4

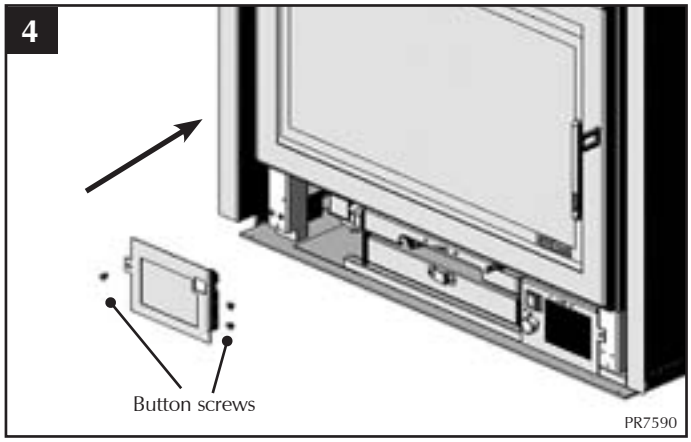

Refit left hand fascia, *diagram 4*

5

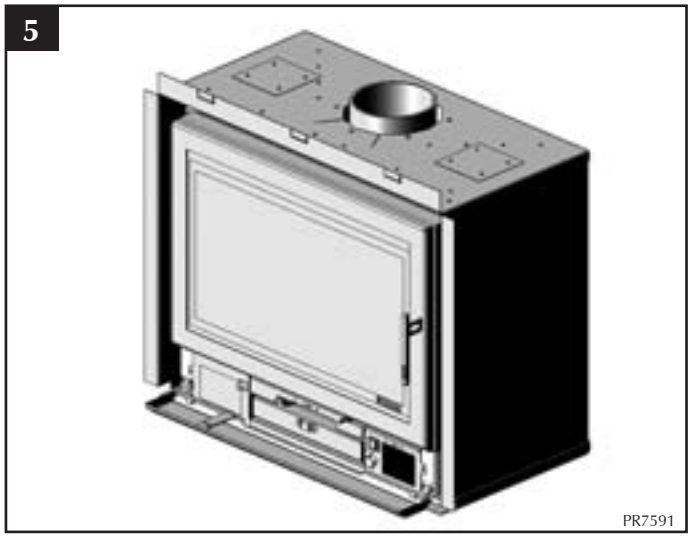

Refit the ash cover and hinges, *diagram 5*

6

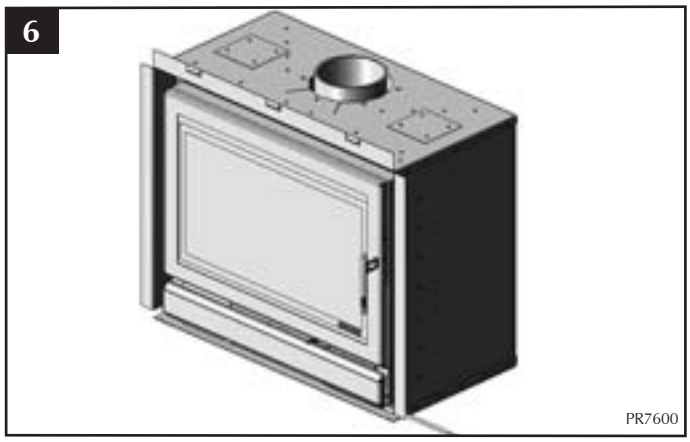

Finish installation

OPERATING INSTRUCTIONS

7

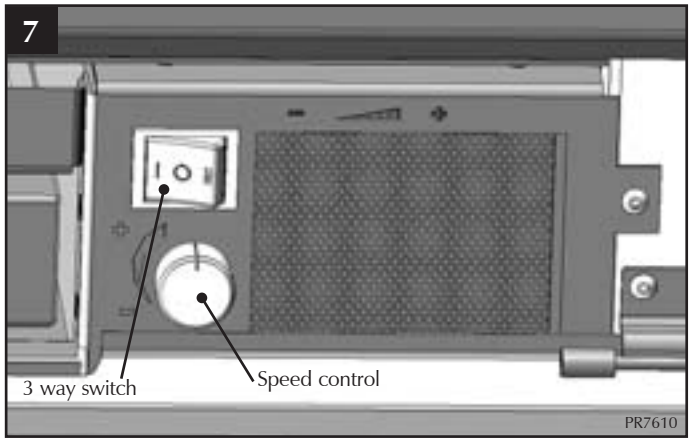

The fan is controlled by a 3 way switch, *diagram 7*

Position 0 - Off
Position I - Automatic. The fan will switch on once the cassette reaches working temperature
Position II - Manual Override. This switches the fan on automatically

Speed Control - This varies the fan speed when the 3 way switch is in position I or II

STOVAX

Stovax Ltd, Falcon Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7LF
Tel: **(01392) 474011** Fax: **(01392) 219932** E-mail: **info@stovax.com** **www.stovax.com**